


# Reentry Cone and Casing

## Scientific Application

The Reentry Cone and Casing (RECC) system is a permanent seafloor installation able to support up to four nested casing strings that case off unconsolidated sediments to achieve deep target horizons. The RECC allows a borehole to be reentered multiple times to deepen the hole or install a borehole observatory for long-term downhole measurements and sampling. The deeper casing strings need to be cemented to isolate the borehole from open circulation between the formation and ocean bottom water or between formation intervals.

## Operation

The reentry cone assembly consists of a reentry funnel mounted on a support plate (mud skirt) that rests on the seafloor and a housing to support the multiple casing strings. The reentry cone is typically run with a short (20–80 m long) casing string (20 or 16 in. diameter). The first string of casing is typically deployed as an integral part of the reentry cone, which is hydraulically washed (or jetted) in pelagic mud and supported without cementation. The soft upper formation “heals” around the casing providing support and a weak annular seal. The first string of casing can also be drilled in with an underreamer and mud motor if the surface sediments are consolidated. Rotation of the casing string is not practical because of the large support plate. Subsequent casing strings are run into a predrilled hole, hung in the housing, and cemented in place.

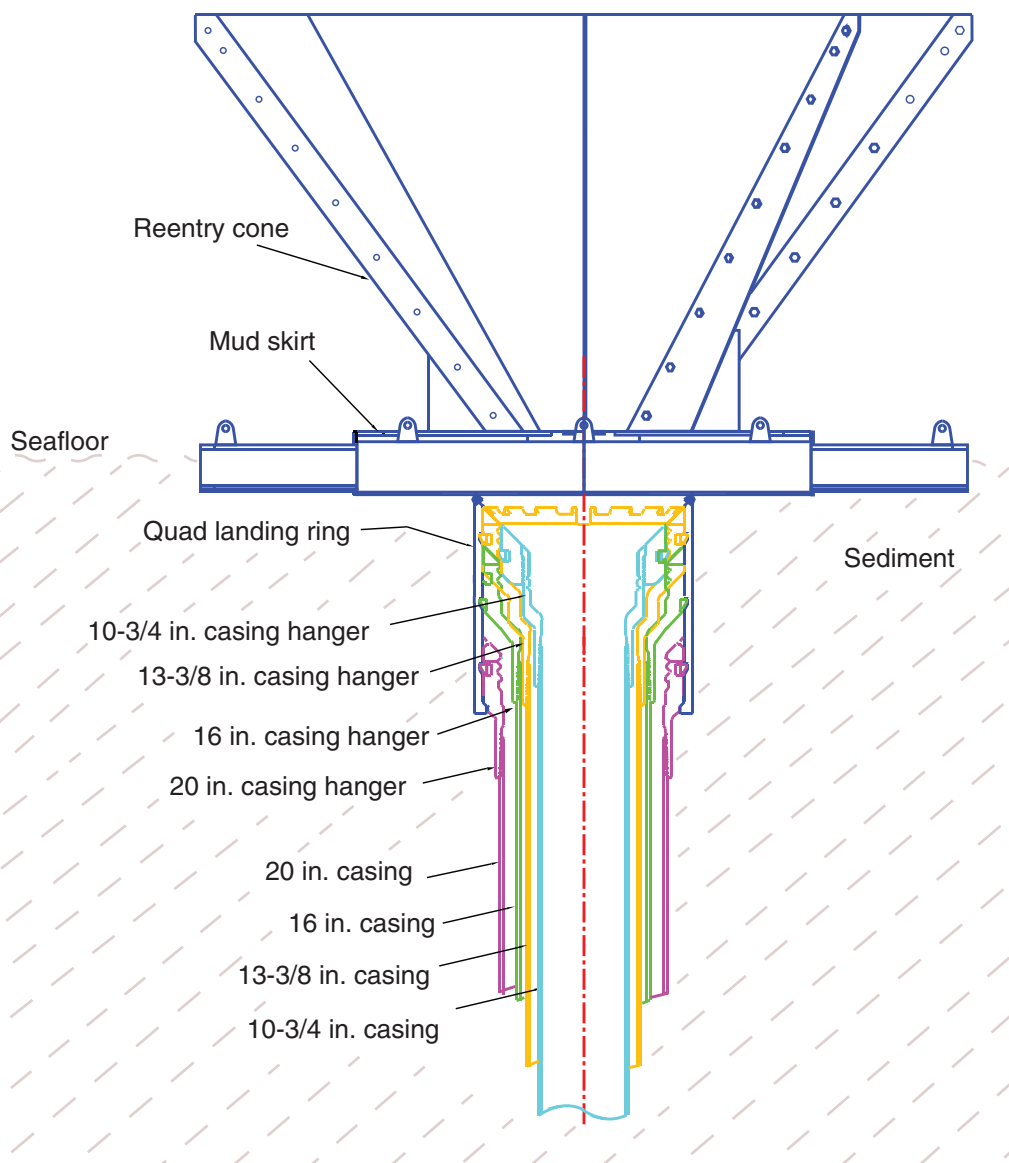

**Schematic of the reentry cone, mud skirt, and housing with four Drill-Quip casing hangers (20 in., 16 in., 13<sup>3</sup>/<sub>8</sub> in., 10<sup>3</sup>/<sub>4</sub> in.) landed in the housing.**

# Features

## Continued Drilling Operations

In compliance with IODP guidelines and to determine the casing setting depth, an 'A' hole must be cored to target depth, followed by logging. The casing is then set in the 'B' hole to isolate unconsolidated formations identified in the 'A' hole. A reentry cone provides a means to mark the seafloor entrance to a borehole and to stabilize the sediments. Coring and/or drilling to total depth (TD) is possible with trips for new bits, reentries, and multiple casing strings. Existing cased legacy holes can be reentered and deepened or instruments can be added at a later date. Coring and/or drilling in a single borehole can be continued to achieve the deep scientific objectives of the leg.

### Reduction of Borehole Instability

Reentry cones provide a means to hang multiple casing strings to seal off unstable formations. In areas of borehole instability, downhole motors and underreamers can be run inside casing while the casing is being installed to ensure that the casing reaches TD. Coring and/or drilling a borehole can be continued through unstable formations.

### Borehole Instrumentation

Reentry cones provide a stable platform for borehole completions. Long-term ancillary scientific investigations can be conducted such as investigating formation permeability, recording temperature and pressure changes over time, conducting fluid sampling, and monitoring seismic events.

Table 1. Casing Size Options

| OD casing (in.)                | Open hole (bit size) (in.)     | OD casing coupling (in.)       | Weight (lb/ft) | ID (nominal) (in.) | Drift (in.) | Cemented??          | TD range (m)     |
|--------------------------------|--------------------------------|--------------------------------|----------------|--------------------|-------------|---------------------|------------------|
| 20                             | 24                             | 21                             | 94.0           | 10.124             | 18.936      | No                  | 40-80            |
| 16                             | 20                             | 17                             | 75.0           | 15.124             | 14.936      | Below 20 in. casing | 40-80 or 200-500 |
| 13 <sup>3</sup> / <sub>8</sub> | 17 <sup>1</sup> / <sub>2</sub> | 14 <sup>3</sup> / <sub>8</sub> | 54.5           | 12.615             | 12.456      | Yes                 | 300-700          |
| 10 <sup>3</sup> / <sub>4</sub> | 14 <sup>3</sup> / <sub>4</sub> | 10 <sup>3</sup> / <sub>4</sub> | 40.5           | 10.050             | 9.894       | Yes                 | 500-1500         |

Note: Recommended casing configurations to avoid running an underreamer to create the open hole for the casing are 16:10<sup>3</sup>/<sub>4</sub> in. and 20:13<sup>3</sup>/<sub>8</sub> in.

## Specifications

### Reentry Cone Diameter

4.0 m (13 ft)

### Height above the Mudline

2.1 m (7 ft)

## Limitations

To minimize operational time for setting casing and reduce the risks associated with an underreaming operation, double casing string configurations are recommended. If triple or quadruple casing programs are required because of formation stability problems, underreaming should be done in the softer formations in the upper hole (<500 to 700 m). The Program does not normally carry underreamers as part of its inventory on board the *JOIDES Resolution*, so proper planning and preparation are needed.